

MEZELMODS HS2 Flasher Topper Installation

**TURN OFF THE POWER TO MACHINE.
ALL steps are to be completed with the power
OFF**


Thank you for purchasing the HS2 Flasher Topper from Mezelmods.com. For product or installation help, please contact support@mezelmods.com

****Note: Installation photos may vary slightly from your machine. ****


Tools needed:

- Phillips Screwdriver


1. Unplug connector at the triac board.

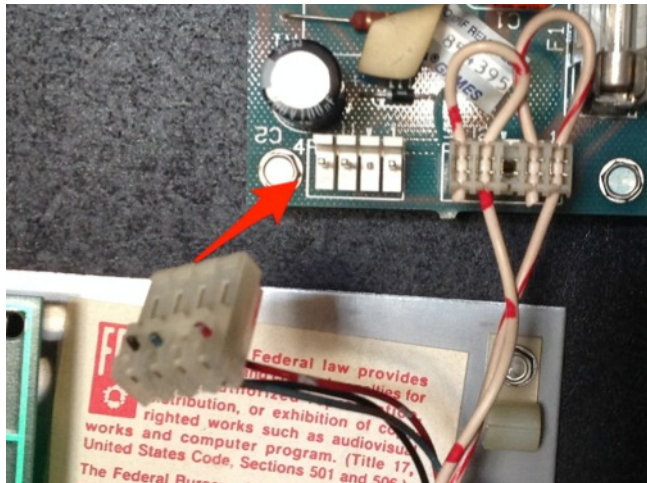

2. Plug harness into board and plug the original connector into the harness.

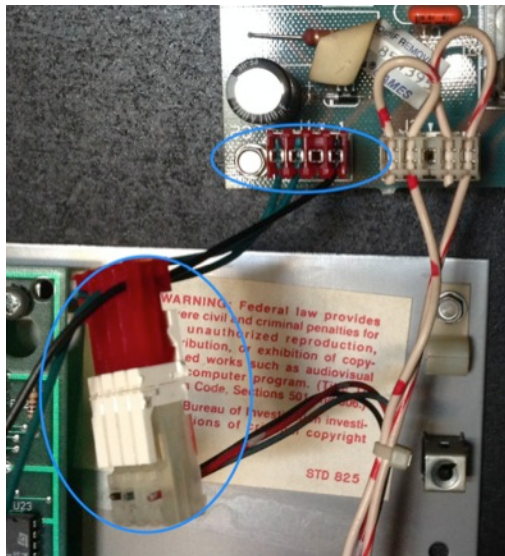

3. Plug one of the connectors from the lights into the harness. These plugs change the mode of flashing.

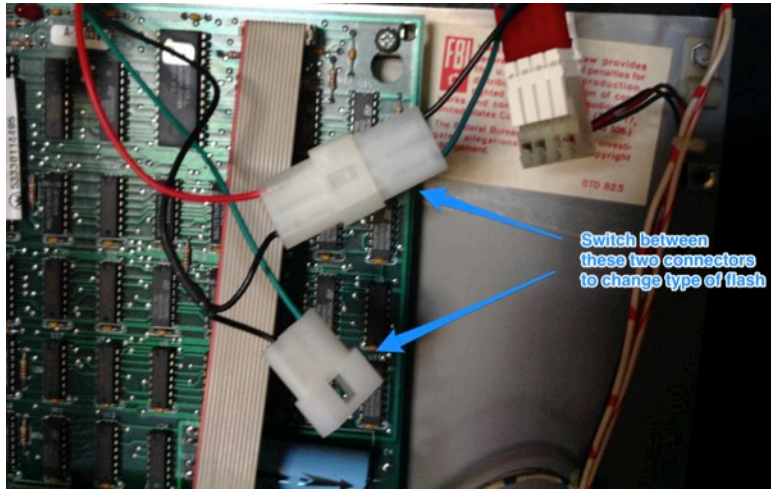

4. Run the wires from the lights through the screen in the back box (see blue arrows). You can loosen the screws to fit the wire behind the screen. Installation is complete!

