



Installation Guide of the “Pino Pinball Mods” Dream Catcher.

For All machine PRO/PREMIUM/LE machine.

Version 1.0a (7th September 2025, 23:52).



First, you have to remove carefully the glass of your pinball.

The first thing to do is to mount your Dream Catcher on its base. To do this, you need to unscrew the two screws that are already screwed into each of the hands of your Dreamcatcher.



Assemble the base by tightening the two screws to obtain this:



Pay attention to the positioning of the cable. You have two options: either place your cable in front of the figurine or behind it. It is up to you.


Once you have done this you will need to remove the plastic number -19 which is located on the right of your pinball machine.



To remove this plastic you need to unscrew the two nuts with a suitable wrench.

You can now place your Dream Catcher on its base in this same location. Then screw the two bolts that will hold your Dreamcatcher in place.

Then lift your playfield in order to unscrew from below the bulb and its base which is located under the plastic number -07. This is what it looks like once disassembled.

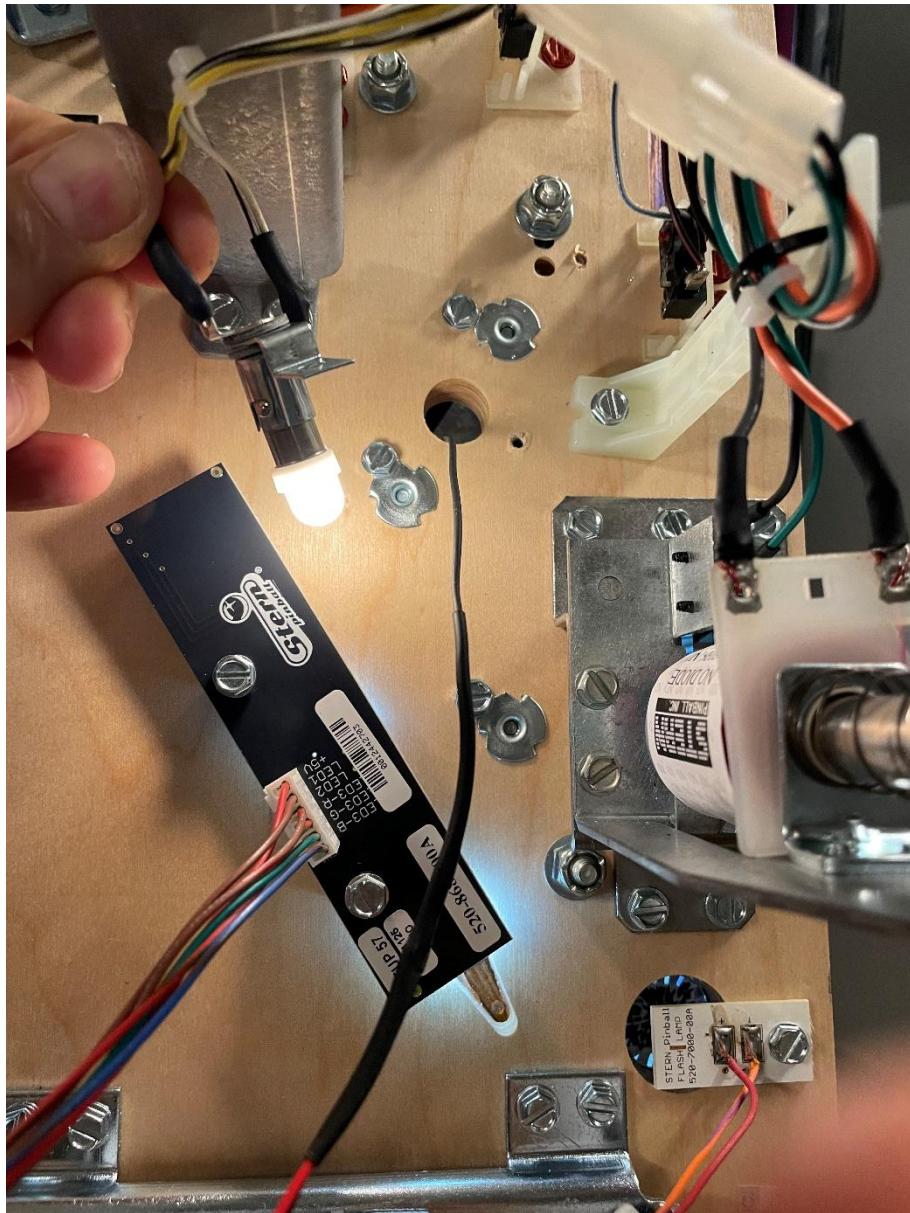

Once unscrewed, you can pass the cable of your Dreamcatcher through the hole you see. Of course, to pass this cable you have to lower your playfield again and pass the cable through the hole located just below the plastic number - 07.



In the following picture you can clearly see the cable near the special bulb that we placed in place of the existing bulb. This special bulb allows us to supply 5v and thus light up the red eyes of your Dreamcatcher.



If you do not want to replace the bulb located on plastic number -07 you can use the 36" extension cable that was provided to get another GI bulb under your playfield.

Your mod is installed. Enjoy !

